



Aero NR Floor System

SYSTEM TYPE: ANCHORED RESILIENT



Factory Fabricated subfloor system with recessed pad pockets providing a low profile and "self-blocking" feature

Pro Action 5/8" (16 mm) Natural Rubber Pads

MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL)
Action Long Length (FJ)
Action Expansion Ridge Technology (ER)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

EN 14904 Type 4
DIN 18032 Part 2 (1991 & 2001)
ASTM F2772
MFMA PUR
FIBA Level 1

SLAB DEPRESSION:

25/32" (20 mm): 2" (50 mm)
33/32" (27 mm): 2-1/4" (57 mm)

LEED:




FloorScore®-certified
Proprietary certified EPD®
FSC-certified Maple and Subfloor available
MR credits – based on products, selected materials and facility locations

PERFORMANCE AND SYSTEM STABILITY:

- Variable load response ProAction pads
- Excellent ball bounce and playability
- Excellent shock absorption
- Factory fabricated subfloor for superior consistency
- SCORES compliant



- Engineered to maximize shock absorption, ball rebound, and point-to-point deflection for outstanding playability.
- Factory fabricated subfloors maximize the products uniformity and consistency contributing to athletic safety.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore Certified in accordance with CDPH 01350.

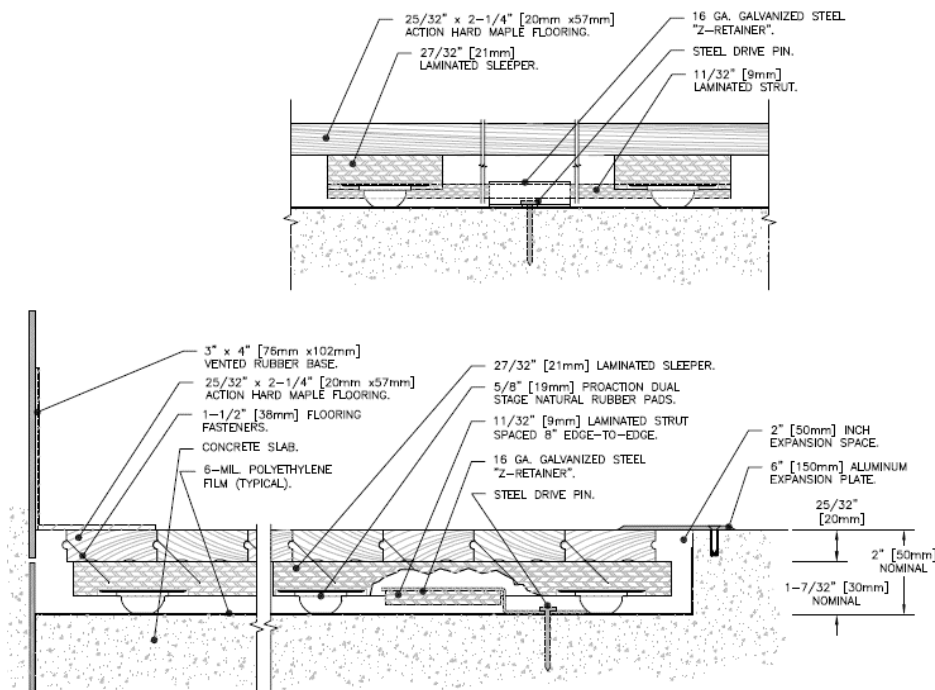

Complete product specifications and system drawings are available online at: www.actionfloors.com



ACTION FLOOR SYSTEMS, LLC
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512
FAX: 715-476-3585 • EMAIL: info@actionfloors.com

actionfloors.com

Rev 12/2017